



Voltage Tuned Oscillator


VTO-105-20T

Features

- Operating frequency:
9.5GHz to 11.5 GHz
- Output Power (50 Ω Load):
7 dBm Minimum
- Modulation Sensitivity:
125 to 250 MHz/V
- Tuning Voltage: 0.5 to 20
Volts
- Low Phase Noise:
< -85 dBc/Hz @100 KHz
- Low Power Consumption
- Frequency Drift over 0°C
to +75°C: 100 MHz
- 0.5 D x 0.18 H inches

Applications


- Transmitter and Receiver
Subsystems for OC-192,
OC-768 / STM-64, STM-256
- Digital Radios
- Low Noise Source



General Description

The VTO-105-20T provides a fundamental, low jitter source for the data re-timing in the transmitter subsystem and clock and data recovery in the receiver of the 10 Gigabit fiber optic systems. This oscillator offers a unique combination of low jitter and wide bandwidth to cover all the common FECs used in 10Gigabit systems. The oscillator uses a high performance low noise Silicon Bipolar transistor in conjunction with a hyperabrupt varactor diode to provide the tuning capability. A GaAs FET buffer amplifier is used to achieve necessary power output and load isolation.

Package Mechanical Dimensions (Inches)

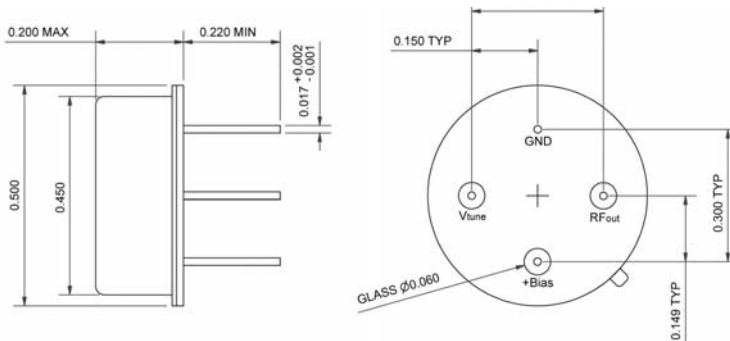

VTO-105-20TS Absolute Maximum Ratings

Parameter	Units	Ratings
Positive Supply Voltage	V	6
Tuning Voltage	V	22
Operating Temperature	°C	-10 to 85
Storage Temperature	°C	-40 to +125

VTO-105-20T Summary Electrical Specifications, 0° C to 75° C

Parameter	Units	Min	Typ	Max
Frequency Range	GHz	9.5		11.5
Vt @ 9.5 GHz	V	0.5		
Vt @ 11.5 GHz	V			20
Output (50 Ω Load)				
Power	dBm	7		13
Voltage p-p	V	1.4		2.8
Tuning Sensitivity	MHz / V	125		250
Modulation Bandwidth	MHz	20		
Output Return Loss	dB	12	14	
Second Harmonic (Below Carrier)	dBc			-17
Third Harmonic (Below Carrier)	dBc			-17
Spurious Output (Below Carrier)	dBc			-60
Phase Noise @				
100 KHz from F _o	dBc / Hz		-90	-85
10 MHz from F _o	dBc / Hz			-130
Frequency Drift over Temperature	MHz			100
Pulling Figure (12 dB Return Loss)	MHz			30
Pushing Figure, +/- 0.2V Supply	MHz			20
Positive Supply Voltage	V	4.8	5	5.2
Positive Supply Current	mA			100
Tuning Port Input Capacitance	pf		23	

Contact Factory for any changes in specifications.

Part Number Ordering Information

Part Number
VTO-105-20T

For more information:
 Phase Matrix Inc.
 109 Bonaventura Dr.
 San Jose, California
 95134 - 2106 USA
 TEL: +1 (408) 428.1000
sales@phasematrix.com
 Data subject to change